

RAD HIGH SPEED 15DX-2

Part Number: **17068**




LIGHTER FASTER STRONGER

More than 25 years of experience in gearbox engineering and design has brought about our latest generation in planetary gearboxes – RAD Single Speed. Designed for extreme duty use in a variety of industries worldwide.

SPECIFICATIONS

Torque Ranges: 500 ft. lbs. – 1500 ft. lbs.
 Speed: 50 RPM
 Weight: 10.5 lbs.
 Square Drive: 1.0”
 Noise Level: 80 dB
 Repeatability: +/-2%
 Accuracy: +/-4%

DIMENSIONS

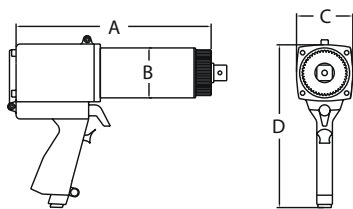

DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
9.9"	2.7"	2.75"	8.1"



Non Impacting



Safe & Reliable



Class 1 Division 2 Group A, B, C, D T4



Accredited ISO/IEC 17025

Included Tool Holder

With FRL unit, 12' hose and fittings



SUITABLE REACTION ARMS

Standard
PN: 17375



Deep Socket
PN: 18480



Double Ended Arm
PN: 19094



Blank
PN: 17888



Double Ended Blank
PN: 19093



Retaining Ring
PN: 17367



info@specanalytics.com | www.specanalytics.com | 225-319-7349