

RAD SINGLE SPEED 50DX



Part Number: **20248**




LIGHTER FASTER STRONGER

More than 25 years of experience in gearbox engineering and design has brought about our latest generation in planetary gearboxes – RAD Single Speed. Designed for extreme duty use in a variety of industries worldwide.

SPECIFICATIONS

Torque Ranges: 1500 ft. lbs. – 5000 ft. lbs.
 Speed: 6.7 RPM
 Weight: 23.5 lbs.
 Square Drive: 1.5"
 Noise Level: 85 dB
 Repeatability: +/-2%
 Accuracy: +/-4%

DIMENSIONS

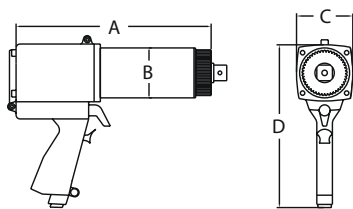

DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
11.25"	3.75"	3.75"	10.4"



Non Impacting



Safe & Reliable



Class 1 Division 2 Group A, B, C, D T4



Accredited ISO/IEC 17025

Included Tool Holder

With FRL unit, 12' hose and fittings



SUITABLE REACTION ARMS

Standard
PN: 25286



Deep Socket
PN: 26118



Double Ended Arm
PN: 26119



Blank
PN: 26120



Double Ended Blank
PN: 26121



Retaining Ring
PN: 21455



info@specanalytics.com | www.specanalytics.com | 225-319-7349