

B-RAD BL SELECT 500

Part Number: **28283**



LIGHTER FASTER STRONGER


The newly designed B-RAD BL Select Series offers higher speed and longer battery life while incorporating a new torque display with buttons. The B-RAD BL Select allows the user to easily select the target torque.

SPECIFICATIONS

Torque Ranges: 130 ft. lbs. – 500 ft. lbs.
 Speed: 21.5 RPM
 Weight: 7.7 lbs.
 Square Drive: 0.75"
 Noise Level: 75 dB
 Repeatability: +/-2
 Accuracy: +/-5%



DIMENSIONS



DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
9.1"	2.5"	2.65"	10.3"



Non Impacting



Safe & Reliable




Class 1 Division 2 Group A, B, C, D T4



Accredited ISO/IEC 17025

ACCESSORIES

B-RAD Select Double Safety Trigger Option
 PN: 25949

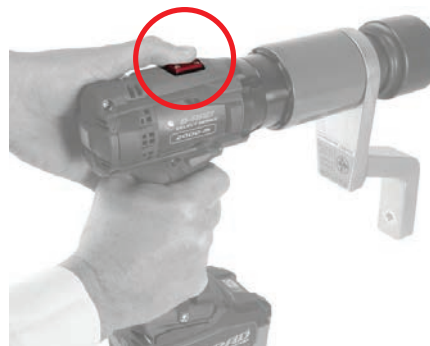

SUITABLE REACTION ARMS

Standard
 PN: 192060



Deep Socket
 PN: 13367



Double Ended Arm
 PN: 13368



Blank
 PN: 13364



Double Ended Blank
 PN: 13365



Retaining Ring
 PN: 12733



info@specanalytics.com | www.specanalytics.com | 225-319-7349